

D461R1

Isolating Barrier for our A5S1... sensors in hazardous areas Series D461R1



D461R1 Front View

Safety first – for intrinsically safe (Ex ia) implementations

The BRAUN Isolating Barrier units D461R1 are ATEX, UKEX, IECEx, KCs certified to meet the particular requirements of explosion protection areas (Zone 0 or 1). In addition, they are approved for other international standards such as UL/CSA and EAC (the Eurasian Customs Union with Russia, Kazakhstan, and Belarus).

The Isolating Barrier establishes a highly efficient system to detect speed and/or direction in a hazardous area, in conjunction with one of our sensors series A5S1..., to supply high-level output signals to the periphery.

The barrier provides an intrinsic safety circuit for the sensor and its cabling and does not require Ex d measures.

The signal input is isolated from the signal output. Both are isolated versus the power supply. The signal output of the unit repeats the input pulse signals with push/pull characteristics.

The signal input matches the specifications of the speed sensor series A5S1..., which are approved as intrinsic safety devices to be installed in hazardous area Zone 0 or 1.

The sensor supply circuit is monitored, and a fault is signalized.

The barrier unit D461R1 must be installed in a safe (non-hazardous) area or within an explosion-proof (Ex d) enclosure.

KEY FEATURES

- ATEX, UKEX, IECEx, EAC Ex certified
- Protection grade Ex ia IIC
- Establishes a highly efficient system to detect speed (and direction) in a hazardous area, in conjunction with one of our sensors series A5S1...
- Provides intrinsic safety for the sensor and its cabling
- Comprehends sensor supply and signal connection
- Sensor supply monitoring
- Free-floating, therefore maximum immunity versus EMI
- Push/pull signal output to subsequent monitors

BENEFITS

- Maintenance-free during lifetime, therefore minimized TCO
- No EMI influence compared to zener barriers
- No signal degradation compared to zener barriers
- Powerful signal output to signal evaluation




Specifications of D461R1


Conformity to Standards	EU-Directive(s) 2014/30/EU (EMC Directive) 2014/35/EU (Low Voltage Directive) 2011/65/EU (RoHS Directive) 2014/34/EU (ATEX Product Directive) UKEX Standards: BS EN 60079-0, BS EN 60079-11 US Standards: National Electrical Code (NEC) dated 2014 UL 60079-0, UL 60079-11, UL 61010-1, edition 3 Canadian Standards: Canadian Electrical Code (CEC) dated 2012 CSA C22.2 Nos. 60079-0, 60079-11, 61010-1	Standard(s) EN 61326-1, EN IEC 61326-3-2 EN 61010-1 EN IEC 63000 EN 60079-0, EN 60079-11
System Configuration	The barrier D461R1 must be installed in the safe (non-hazardous) area, whereas the sensor A5S1 may be placed wherever it is required within the hazardous area, connected via a standard (screened) cable. The D461R1 output may be transmitted without restriction to any signal evaluating unit.	
Sensor Input	Response level (low < 1.8 V, high > 3.5 V) Input impedance 47k Input capacitance C_i and inductivity L_i are negligible Sensor supply: 8 V (nominal value) Approved and certified maximum values $U_o = 8.7$ V $I_o = 64$ mA $P_o = 384$ mW $L_o = 7.9$ mH (IIC) $= 38$ mH (IIB) $C_o = 5.9$ μ F (IIC) $= 50$ μ F (IIB)	
Signal Output	Active pulses by push/pull amplifier output. Min. high level: 18 V Max. low level: 2 V Sensor supply failure signal indicated by relay output (NO).	
Protection grade provided to the Ex-area	Ex ia IIC, $T_a = -20$ °C to +50 °C	
Installation	The barrier must be installed in a safe (non-hazardous) area or within an explosion-proof (Ex d) enclosure.	
Enclosure	Plastic snap-on-track enclosure for 35 mm rail Protection grade IP20 (NEMA 1) Dimensions 22.5 x 99 x 114.5 mm Weight approx. 0.4 kg	
Power Supply	D461R1.xxU1: 18...40 V _{uc} , power requirements approx. 5 W D461R1.xxU2: 85...250 V _{ac} , power requirements approx. 5 W	
Connectors (Wiring)	Screw mounting, terminal blocks, accepting 0.2...2.5 mm ² cross section	
Operating Conditions	Ambient temperature: -20...50 °C (-4...122 °F) Relative humidity max. 95%, non-condensing	

Available Models	Power Supply		In	Out	Application
	18...40 V _{uc}	85...250 V _{ac}			
with identical dimensions and input / output specifications	D461R1.11U1	18...40 V _{uc}	1	1	one speed signal
	D461R1.11U2	85...250 V _{ac}			
	D461R1.12U1	18...40 V _{uc}	1	2	one speed signal
	D461R1.12U2	85...250 V _{ac}			with two outputs
	D461R1.21U1	18...40 V _{uc}	2	2	one speed and
	D461R1.21U2	85...250 V _{ac}			one direction signal or two speed signals


Function Diagram and Terminal Nos of D461R1.11

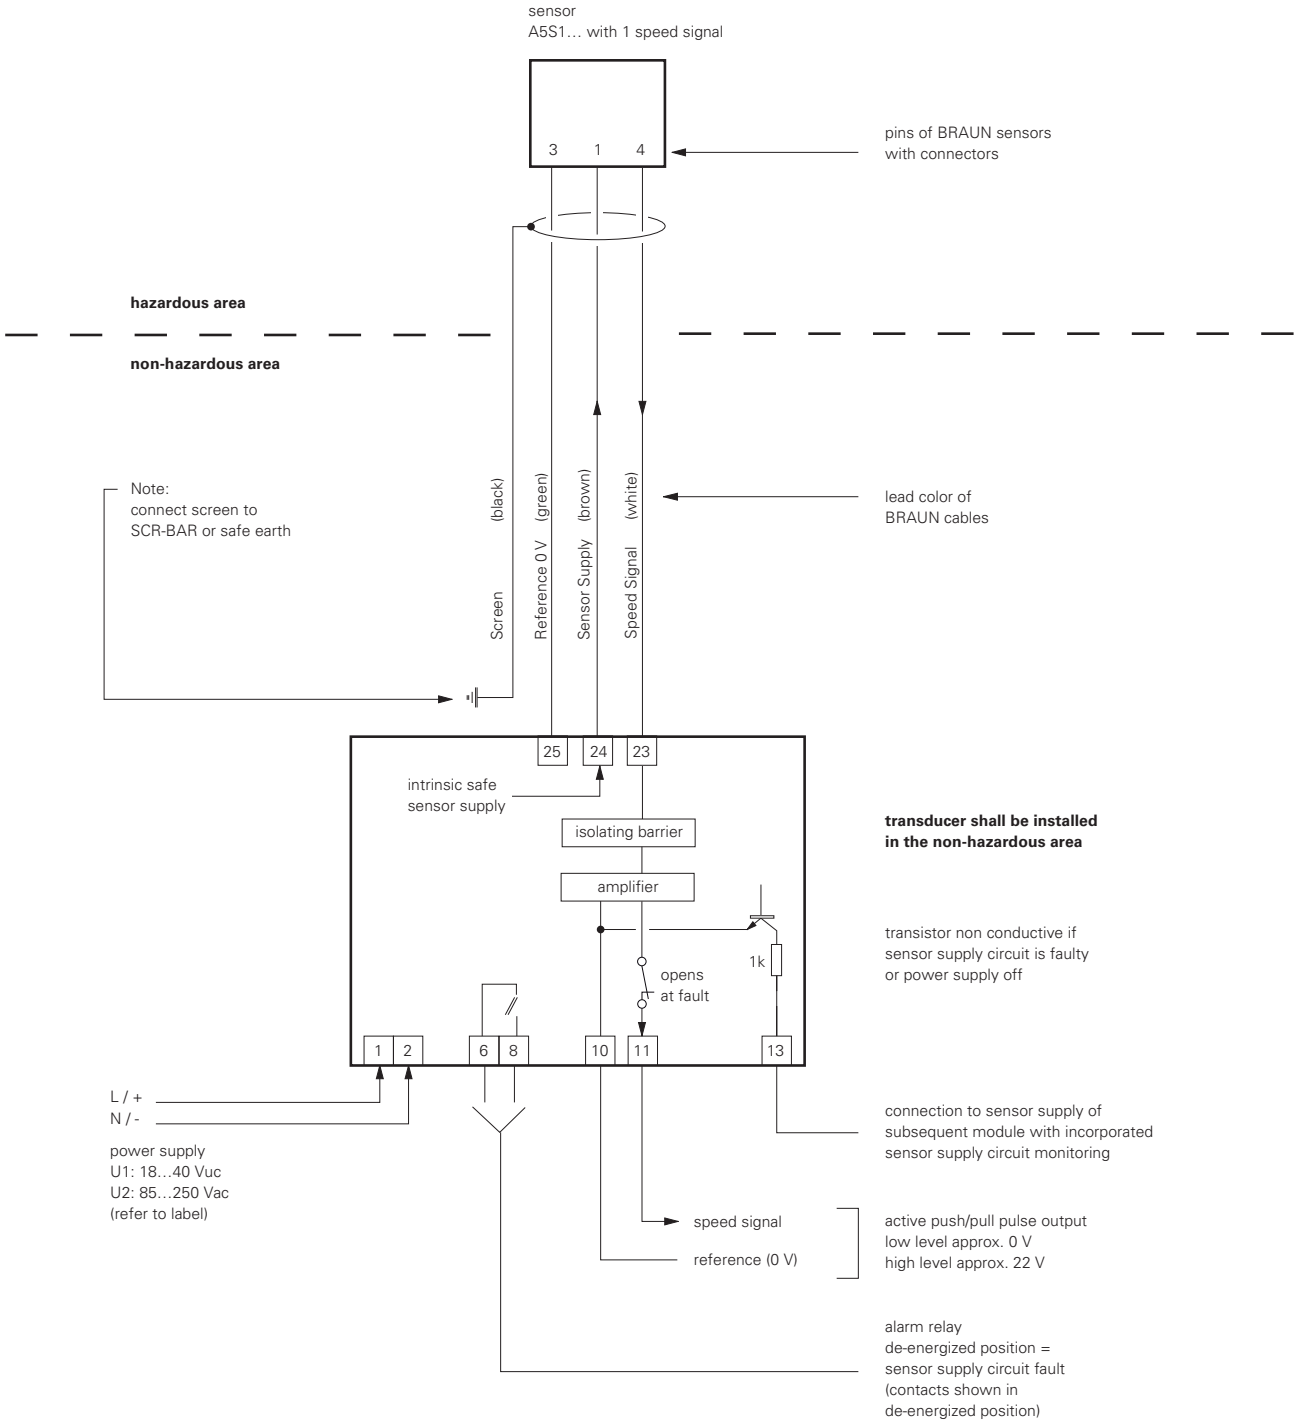

Function Diagram and Terminal Nos of D461R1.12

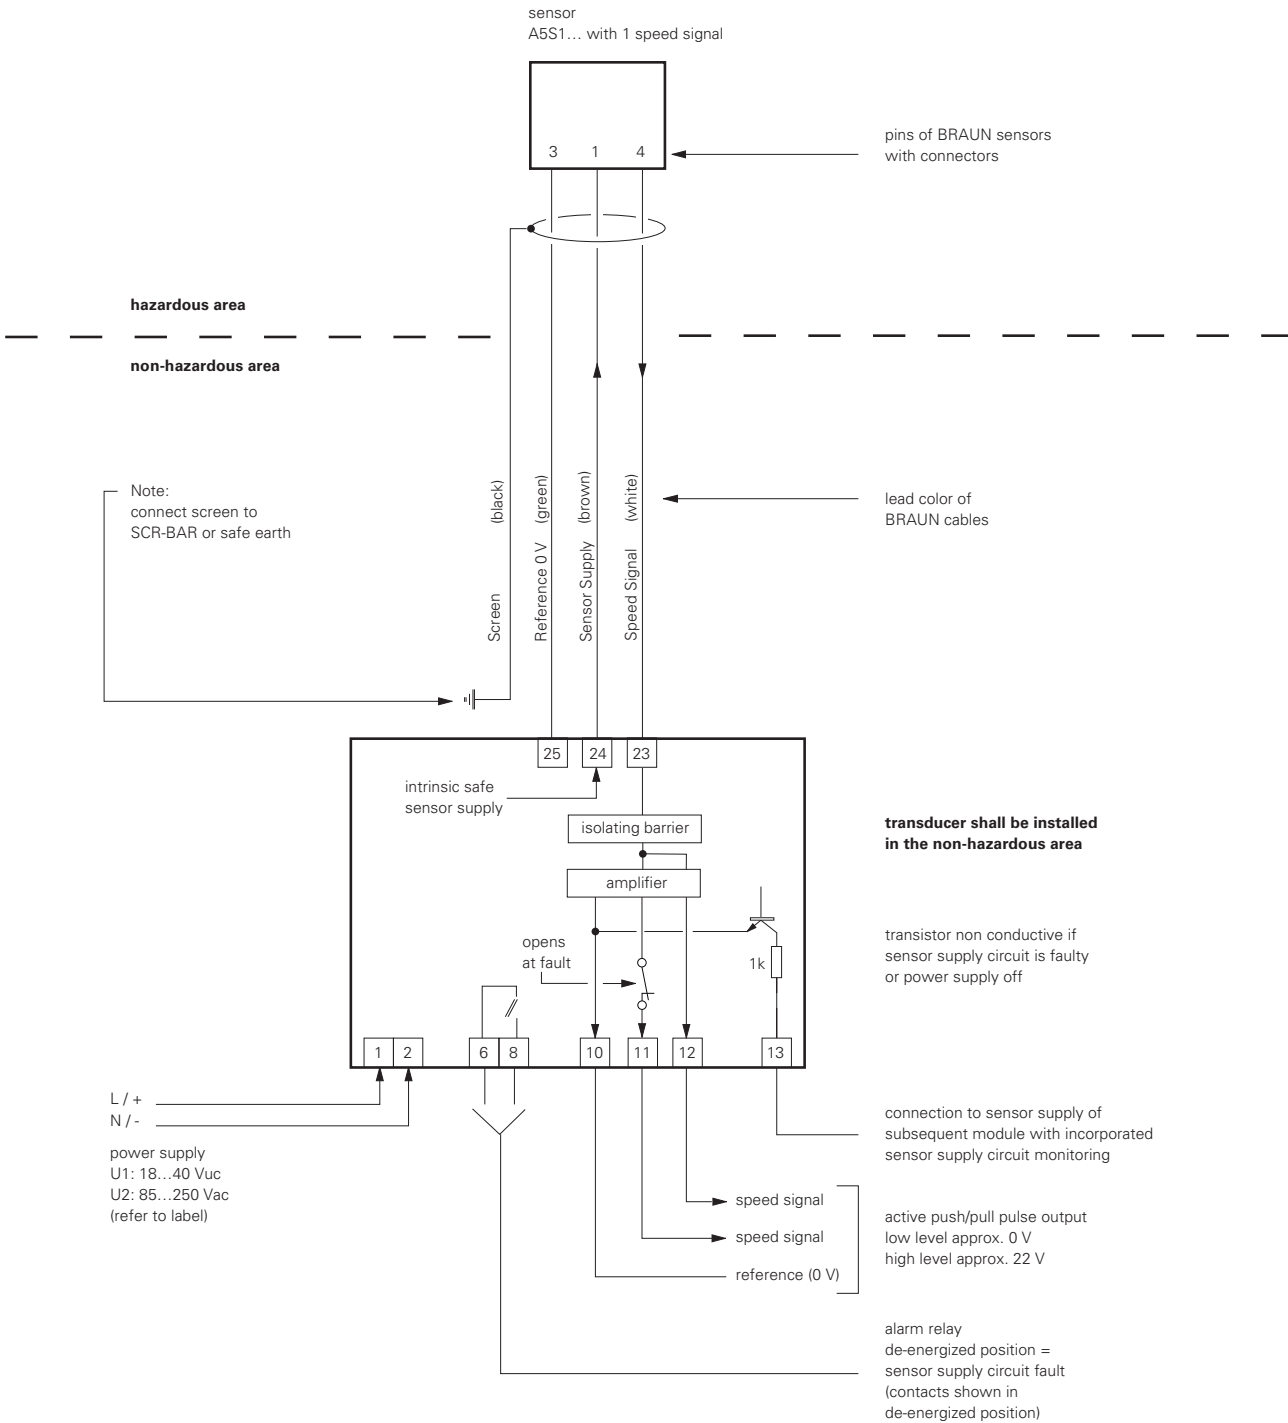

Function Diagram and Terminal Nos of D461R1.21

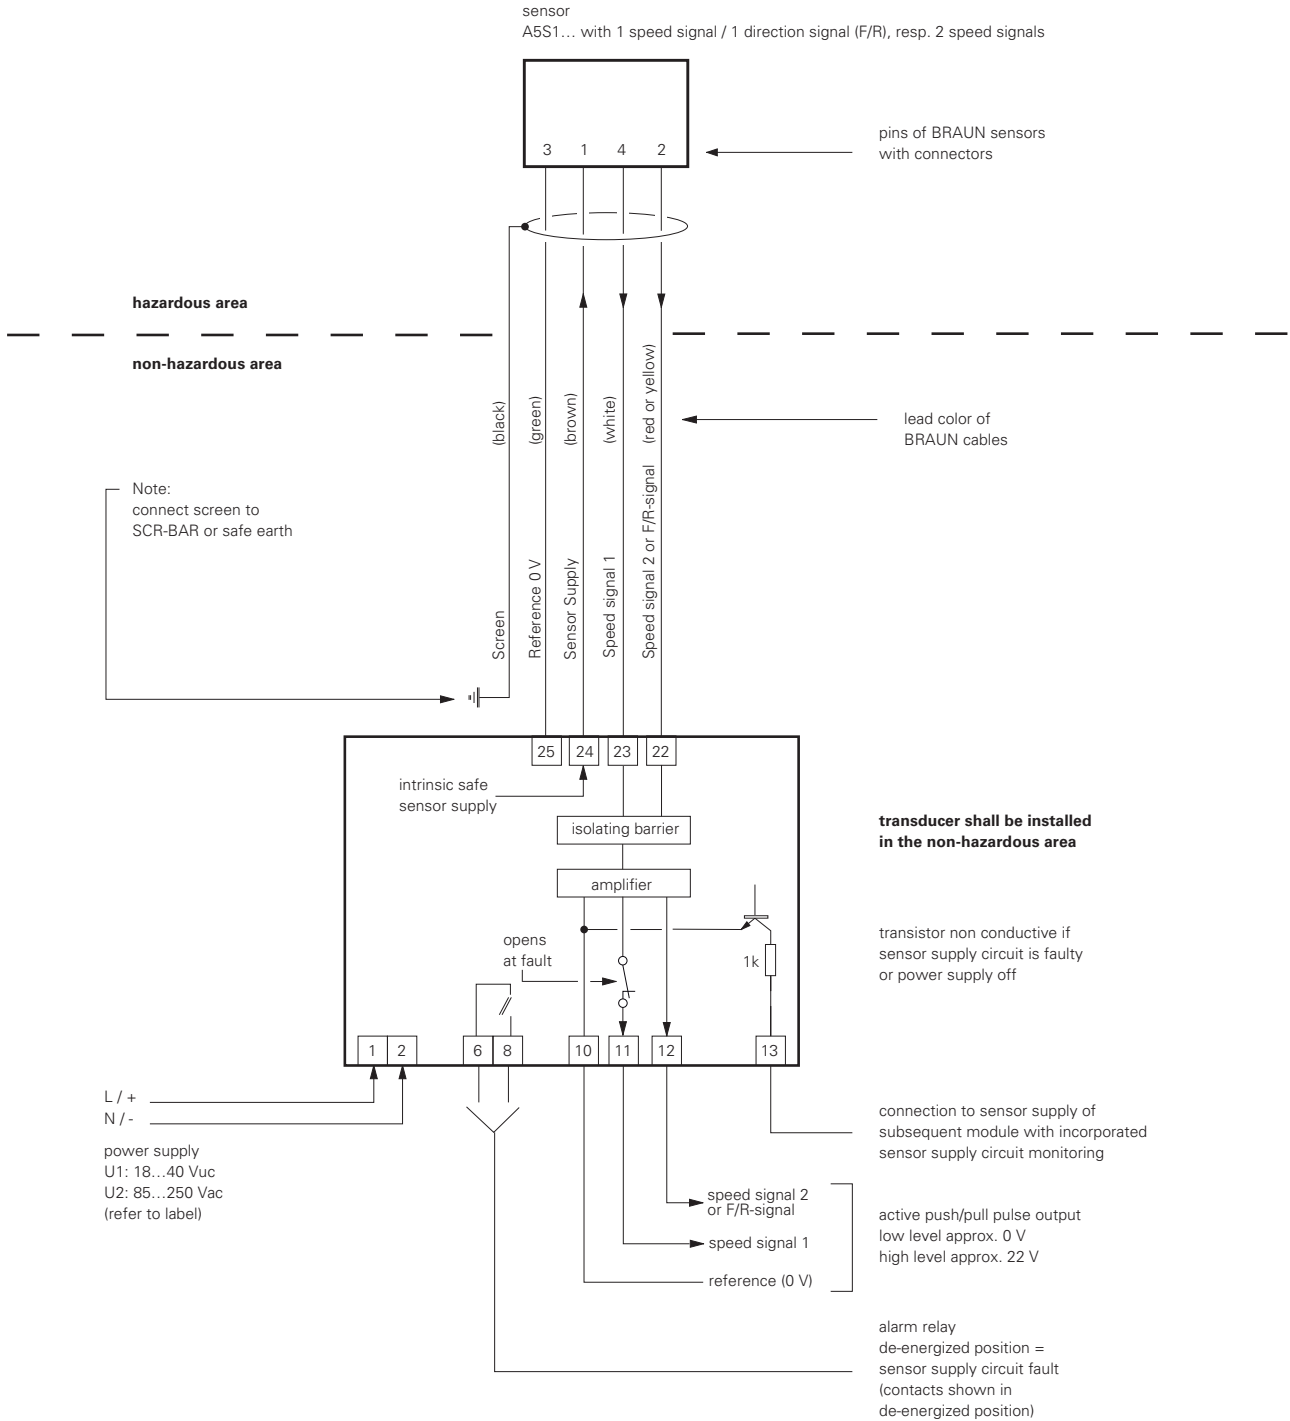

Ordering Key D461R1

D461R1. a b

Channels incorporated

a = **11** : 1x signal input into 1x isolated signal output
a = **12** : 1x signal input into 2x isolated signal output
a = **21** : 2x signal input into 2x isolated signal output

Supply voltage

b = **U1** : 18...40 V_{ac}
b = **U2** : 85...250 V_{ac}

Examples:

D461R1.11U2:
with 1 input signal into 1 isolated signal output signal for 85...250 V_{ac}

D461R1.11U1:
with 1 input signal into 1 isolated signal output signal for 18...40 V_{ac}

D461R1.12U1:
with 1 input signal into 2 isolated signal output signals for 18...40 V_{ac}

D461R1.21U2:
with 2 input signals into 1 each isolated signal output signal for 85...250 V_{ac}

BRAUN – Speed Monitoring and Protection Systems for Rotating Equipment

BRAUN Industrial Electronics develops, produces, and supplies “Rotating Equipment” protection systems for industrial applications worldwide, focusing on overspeed protection. These systems comply with the highest standards of safety and availability.

As a globally leading technology provider with over 60 years of experience, BRAUN has been continually meeting and mastering the challenges associated with protecting the facilities of companies within the power generation, oil, gas, and chemical industries. Our protection systems are installed in more than 100 countries worldwide, and our customers use them in safety-critical applications with “Rotating Equipment”.

For our OEM customers, BRAUN is both a solution-oriented systems provider and a reliable system partner.

Our solutions comprise a variety of products for the detection and monitoring of speed and related parameters.

Always matching the requirement. Always the perfect solution for safety and availability.

